


# MOTOR SPECIFICATION

MOTOR No.	BCB No.	500522-71C	
	CUSTOMER	VARIOUS	
I.R. No.	6780	CAPACITOR	uf/V
POWER OUTPUT	23.0 W	START	NIL
MOTOR TYPE	SHADED POLE	RUN	NIL
SUPPLY	VOLTS	HERTZ	PHASE
	240	50	SINGLE
ENCLOSURE	VENTED ENDSHIELDS		
SPEED	1300	RPM. AT RATED OUTPUT	
ROTATION	CLOCKWISE (DRIVE END)		
INSULATION CLASS	E120	DUTY	A.O.M.
THERMAL PROTECTION	AUTO RESET OVERLOAD		
SUPPLY CURRENT	0.45	AMPS AT RATED OUTPUT	
APPLICATION	VARIOUS		
COUNTING	TAPPED HOLES IN ENDSHIELDS		
BEARING & LUBRICATION	BALL & WIDE RANGE GREASE		
SUPPLY LEAD	COLOUR	GREY	
	<input checked="" type="checkbox"/> FLEX	LENGTH	750.0 (45.0 STRIPPED)
	<input type="checkbox"/> SINGLE CORE	TERMINATION	BOOTLACES
		FIXING	NIL
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	_____		
PERFORMANCE SPECIFICATION	_____		
MOUNTING SPECIFICATION	_____		
CONNECTION DIAGRAM	_____	PAINT SPEC.	NIL

SPECIAL REQUIREMENTS

1) VENTED ENDSHIELDS BOTH ENDS

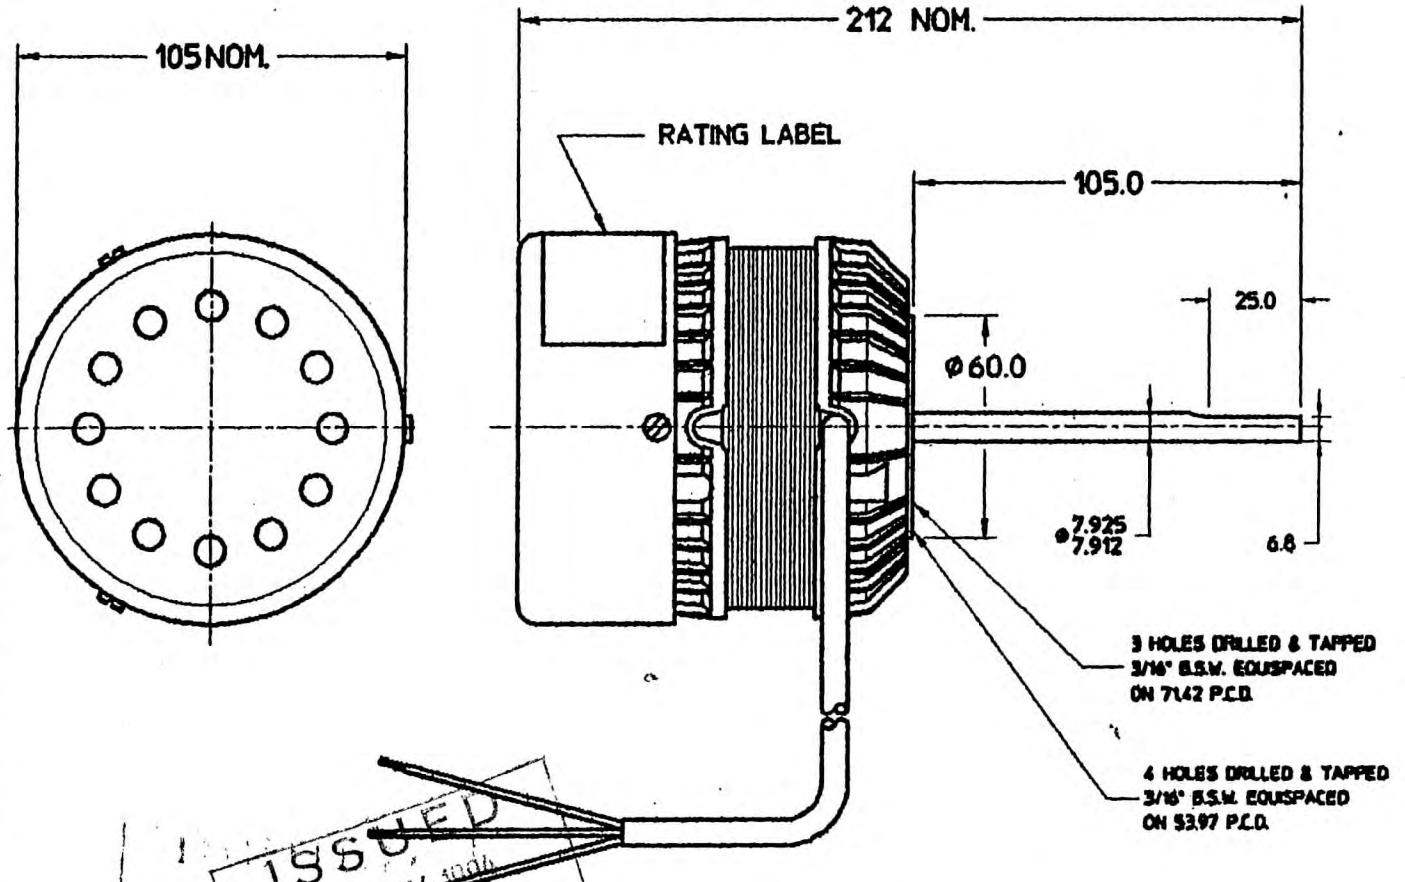

**ISSUED**  
 24 MAY 2006  
 DESTROY ALL EXHIBITS, BEARING  
 PROPERLY

**CONTROLLED COPY**



STAMP LINE (M) SET IS F.I.T. WHICH MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION