


FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.




MOTOR SPECIFICATION

8061S009-06

Q.R. No.	5022	CUSTOMER NO.						
CUSTOMER	VARIOUS							
MOTOR RATING	VOLTS	240	Hz	50	Ph	1	Duty	AOM
	RPM.	915				2.65	AMPS	
	NOM. OUTPUT	250 WATTS						
	ROTATION	CLOCKWISE D/END						
	CAPACITOR	START	μF/V		RUN	6/440 μF/V		
	ENCLOSURE	TOTALLY ENCLOSED						
	MOTOR TYPE	CSR	INSULATION CLASS	B130				
	THERMAL PROTECTION	AUTO RESET OVERLOAD						
	APPLICATION	FAN						
	BEARING D.E.	6202 ZZ	LUBRICATION	LONG LIFE, WIDE RANGE				
	BEARING N.D.E.	6202 ZZ						
	SUPPLY LEAD	FLEX 1500 ± 30 GREY						
	EARTH PROVISION	VIA SUPPLIED LEAD						
	BASIC BUILD SPECIFICATION	305-570-05	PAINT/ COLOUR	NIL (PRIMER)				
	PERFORMANCE SPECIFICATION	SP85049-02						
	CONNECTION DIAGRAM	393-072	RATING LABEL	SSTDAUTO.FMT				

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION

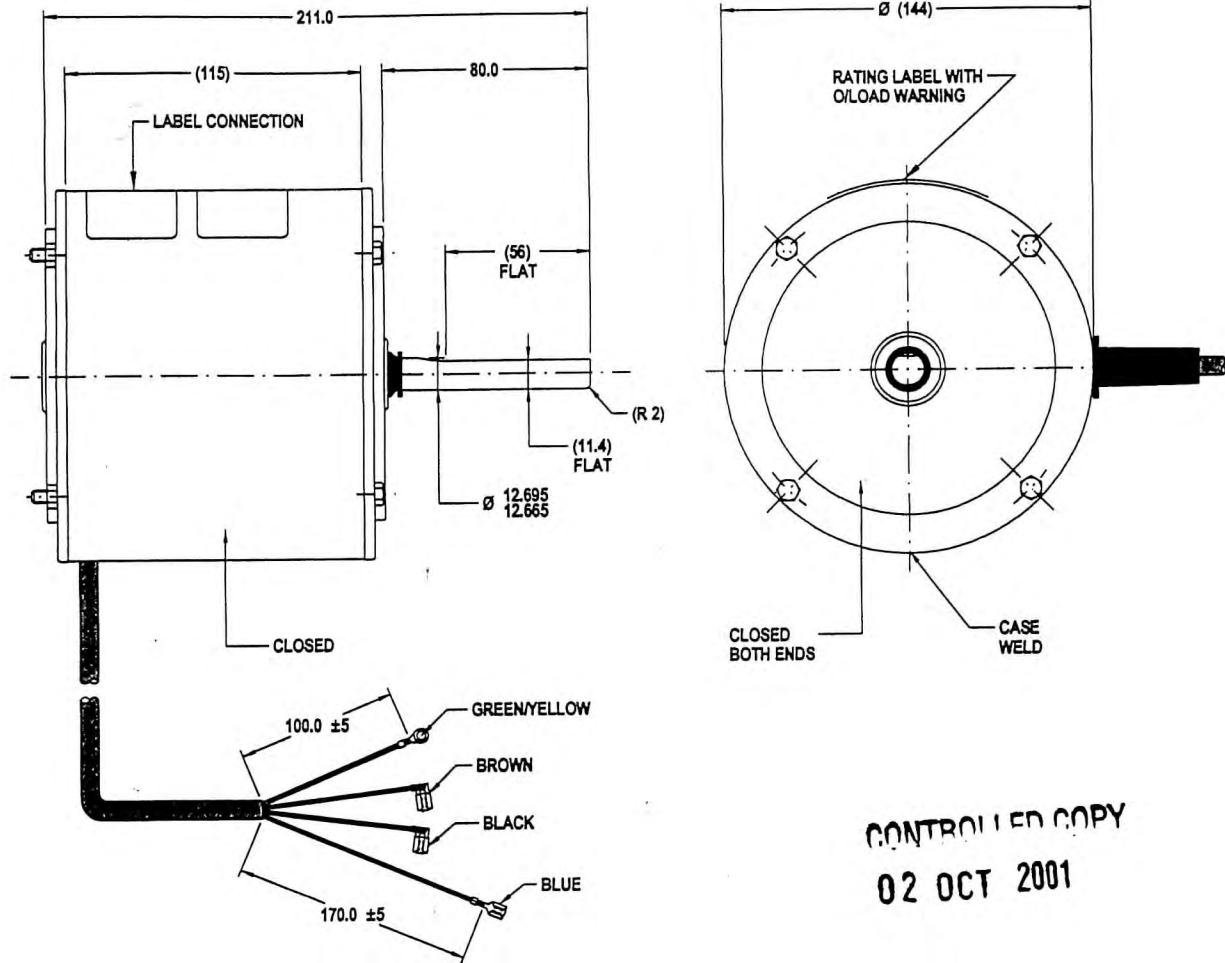

CONTROLLED COPY
02 OCT 2001

FASCO

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

N693

MODEL **8061S009-06**

VOLTS 240	R.P.M. 915	CLASS B130	Hz 50
WATTS 250	TYPE CSR	μF/V S NIL	Ph 1
AMPS 2.6	DUTY AOM	μF/V R 6/440	PROT. AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:

- 1) "V" SEAL TO BE FITTED TO SHAFT
- 2) TIE RODS TO BE ASSEMBLED WITH RED FIBRE WASHERS
- 3) CAPACITOR SUPPLIED LOOSE



MIC No. 004472
BY: NITHAD
Date: 01/10/01
MIC No: MODIFIED LEAD EXIT FROM NDE/ESH TO BE ON MOTOR CASE