


FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.




THIRD ANGLE PROJECTION

MOTOR SPECIFICATION

8061S019-80

Q.R. No.	6739	CUSTOMER NO.	-
CUSTOMER	VARIOUS		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty AOM
	RPM.	1300	1.8 AMPS
NOM. OUTPUT	250 WATTS		
ROTATION	CLOCKWISE AT LEAD END		
CAPACITOR	START	----- μF/V	RUN 6/440 μF/V
ENCLOSURE	VENTED E/SHIELDS		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	BLOWER		
BEARING D.E.	6202ZZ	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202ZZ		
SUPPLY LEAD	SINGLE CORE 700 ± 30 BRAIDED SLEEVING		
EARTH PROVISION	VAI SUPPLIED LEAD		
BASIC BUILD SPECIFICATION	305-570-02	PAINT/ COLOUR	NIL (PRIMER)
PERFORMANCE SPECIFICATION	SP85054-02		
CONNECTION DIAGRAM	393-402-04	RATING LABEL	SSTDAUTO.FMT

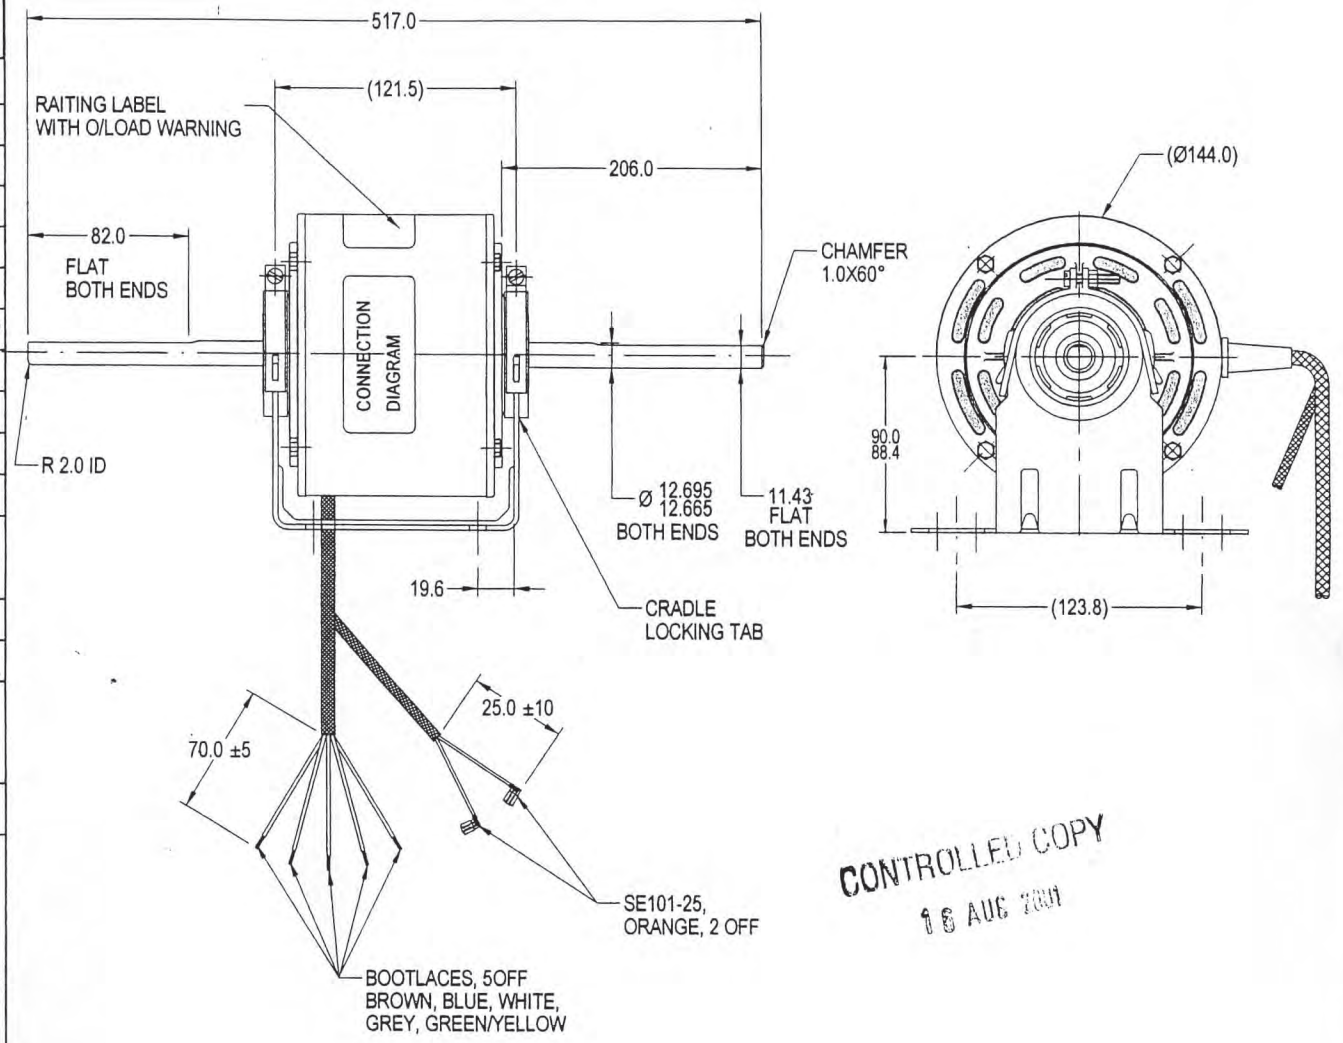

CONTROLLED COPY
18 AUG 2001

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

N693

MODEL	8061S019-80
-------	-------------

VOLTS 240	R.P.M. 1300	CLASS B130	Hz 50
WATTS 250	TYPE CSR	μF/V S NIL	Ph 1
AMPS 1.8	DUTY AOM	μF/V R 6/440	PROT. AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:

- 1) CAPACITOR TO BE SUPPLIED LOOSE

MIC No. 003786
By: NUTAPONG
Date: 21/02/01
MIC ADD NAME PLATE AND UPDATE E/SHIELDS
Note:

