

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.





MOTOR SPECIFICATION

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION

8061S137-80

Q.R. No.	6680	CUSTOMER NO.	-
CUSTOMER	VARIOUS		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty ACM
	RPM.	910	23 AMPS
	NOM. OUTPUT	250 WATTS	
ROTATION	CLOCKWISE AT DRIVE END		
CAPACITOR	START	—	μF/V RUN 4/440 μF/V
ENCLOSURE	TOTALLY ENCLOSED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET THERMAL OVERLOAD		
APPLICATION	FAN - SHAFT HORIZONTAL		
BEARING D.E.	6202 DDU C3	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU C3		
SUPPLY LEAD	-		
EARTH PROVISION	INTERM. BOX		
BASIC BUILD SPECIFICATION	305-570-05	PAINT/ COLOUR	PC GREY CASE PLAIN B/SH
PERFORMANCE SPECIFICATION	SP85115-01		
CONNECTION DIAGRAM	393-333-01	RATING LABEL	SSTDAUTO.FMT

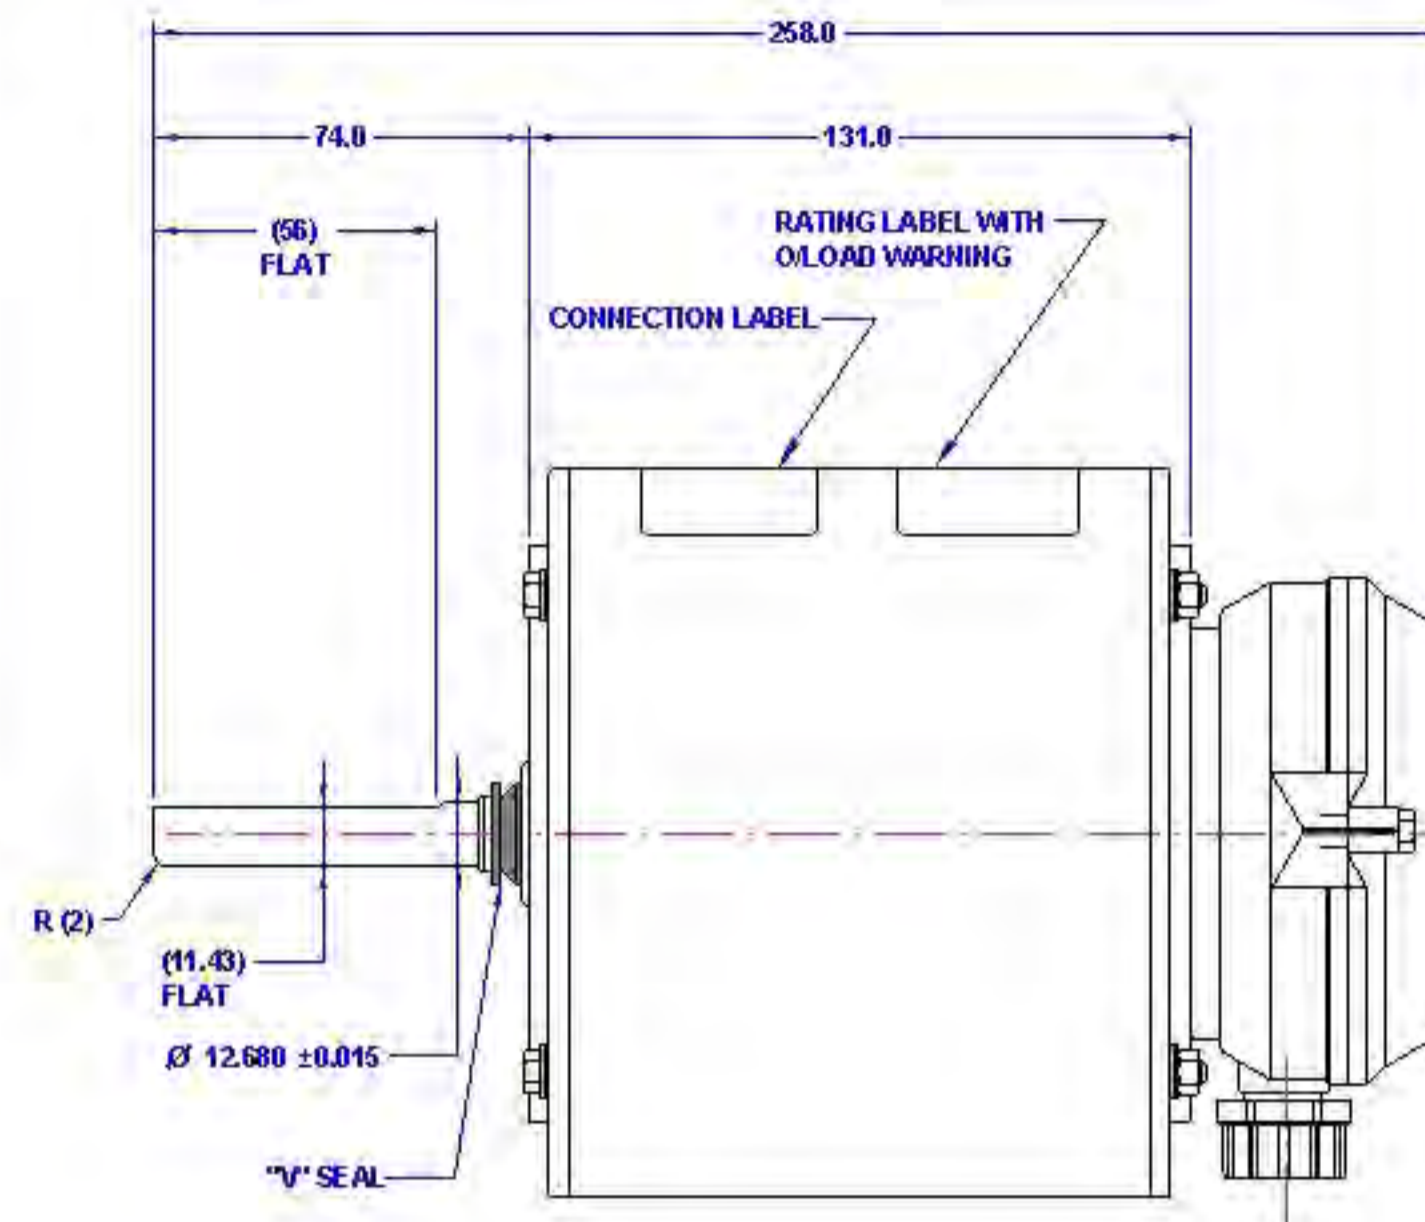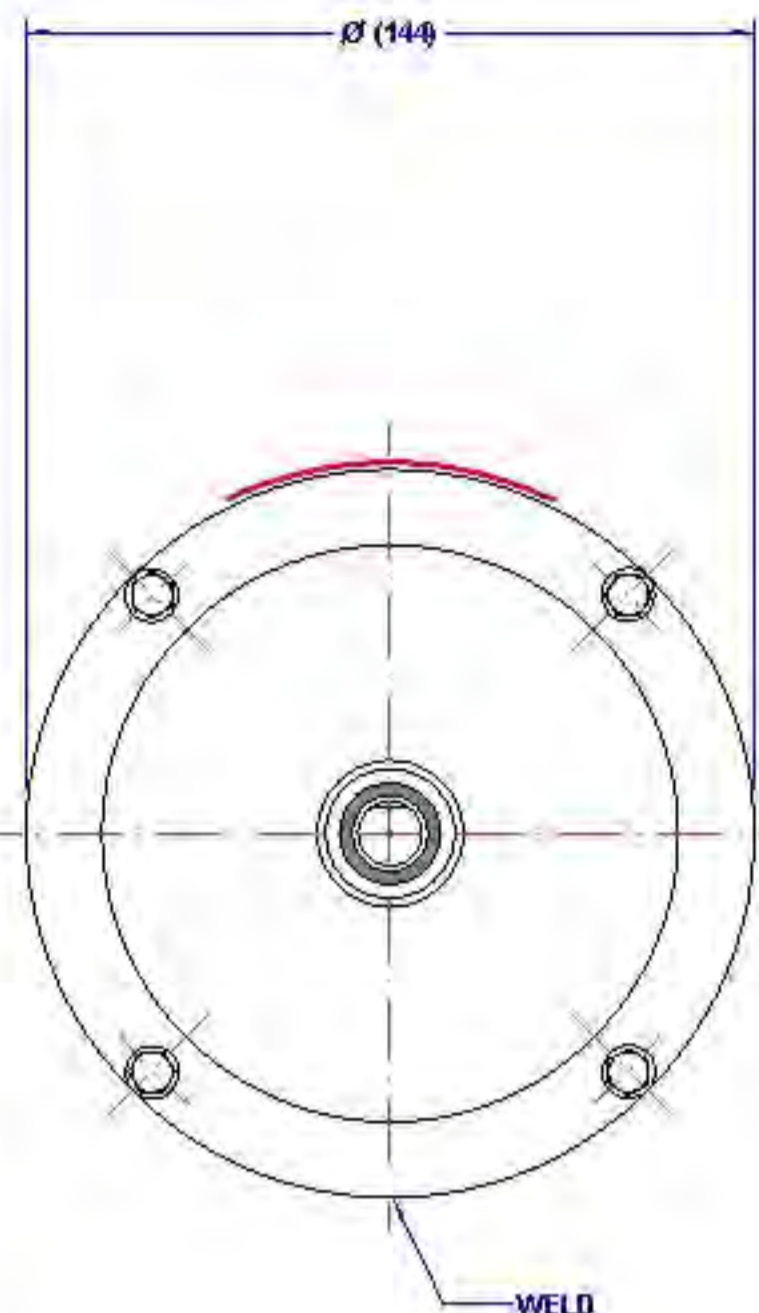

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

N693 ddmmyyxxxx

MODEL	8061S137-80		
VOLTS	240	R.P.M.	910
WATTS	250	TYPE	CSR
AMPS	2.3	DUTY	ACM
		CLASS	B130
		Hz	50
		μF/A S	NIL
		Ph	1
		μF/A R	4/440
		PROT.	AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

MIC No. 007446
 BY: NITHAD
 Date: 05/09/03
 MIC CHANGE ROTATION TO BE CLOCKWISE DRIVE END
 Note:

SPECIAL REQUIREMENTS:

- 1) WEATHERPROOF MOTORS TO ES050
- 2) NON DRIVER B/SH TO BE ASSEMBLED SO THAT LEAD EXIT HOLE IS CLOSED TO THE WELD

