

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.



V.20


MOTOR SPECIFICATION

Q.R. No.		CUSTOMER NO.		-	
CUSTOMER					
VARIOUS					
VOLTS	415	Hz	50	Ph	3
DUTY	AOM				
RPM.	1400				
AMPS	0.9				
NOM. OUTPUT	180 WATTS				
ROTATION	CLOCK WISE DRIVE END (PHASED ROTATION)				
CAPACITOR	START	µF/V	RUN	µF/V	-----
ENCLOSURE	TOTALLY ENCLOSED				
MOTOR TYPE	3 PH	INSULATION CLASS	B 130		
THERMAL PROTECTION	NIL				
APPLICATION	FAN - SHAFT HORIZONTAL				
BEARING D.E.	6202 DDU.	LUBRICATION	LONG LIFE, WIDE RANGE		
BEARING N.D.E.	6202 DDU.				
SUPPLY LEAD	-----				
EARTH PROVISION	IN TERM. BOX				
BASIC BUILD SPECIFICATION	305-570-05	PAINT/ COLOUR	PC GREY CASE PLAIN E/SHIELDS		
PERFORMANCE SPECIFICATION	SP85001-02	RATING LABEL	LABELSTD.FMT		

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS					
ddmm/yyyyxxxx					
FASCO		MODEL	808534LTB-A12		
VOLTS	415	TYPE	3 PHASE	Hz	50
WATTS	180	DUTY	AOM	PH	3
AMPS	0.90	CLASS	B130	PROT.	NIL
R.P.M.	1400	µF/V	S	R	NIL
WATTS IN MAX		MAX kPa			

SPECIAL REQUIREMENTS:
 1)_WEATHERPROOF MOTORS TO ES050
 2)_NON DRIVE ENDSHIELD TO BE ASSEMBLED SO THAT LEAD EXIT HOLE IS CLOSEST TO THE WELD.

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

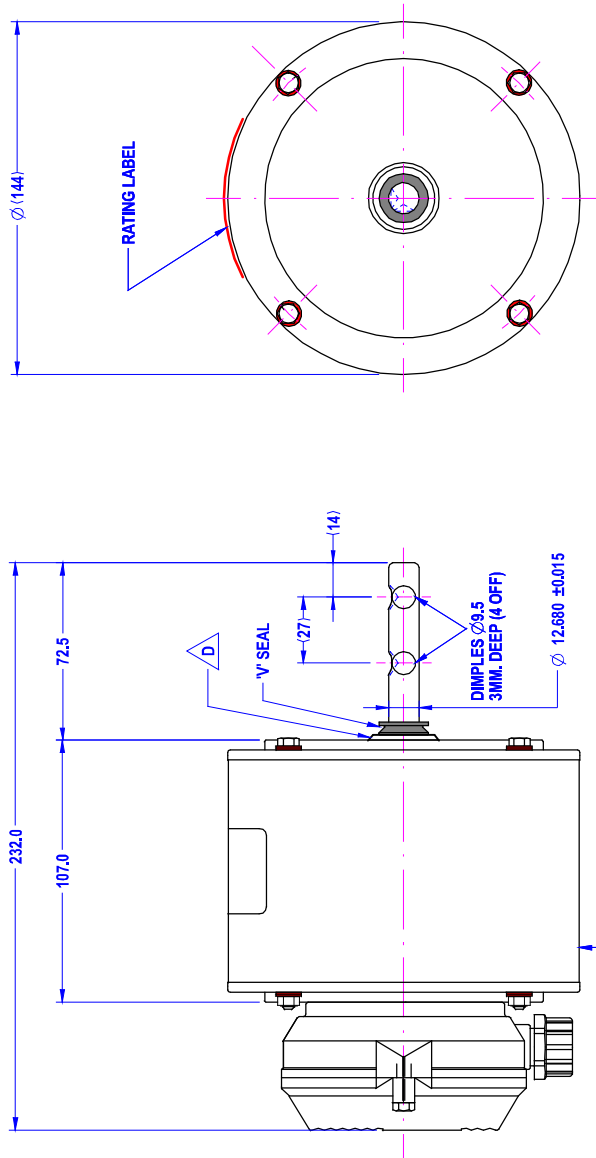

MIC No. 013192 By: PIPAT Date:26/08/11 MIC REVISE DRAWING Note:

