

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS THE PROPERTY OF THE CUSTOMER, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

**MOTOR SPECIFICATION**

**808536MTB-A11**

Q.R. No.	Y001045	CUSTOMER NO.						
CUSTOMER	VARIOUS							
MOTOR RATING	VOLTS	415	Hz	50	Ph	3	Duty	A.O.M.
	PPM	900					0.95	AMPS
NOM OUTPUT	250 WATTS							
ROTATION	CLOCKWISE DRIVE END (REVERSIBLE)							
CAPACITOR	START	.....	µF/V	RUN	.....	µF/V		
ENCLOSURE	TOTALLY ENCLOSED							
MOTOR TYPE	3 PH	INSULATION CLASS	B130					
THERMAL PROTECTION	NIL							
APPLICATION	FAN							
BEARING D.E.	6202 DDU C3 EA2	LUBRICATION	LONG LIFE, WIDE RANGE					
BEARING N.D.E.	6202 DDU C3 EA2							
SUPPLY LEAD								
EARTH PROVISION	INTERM. BOX							
BASIC BUILD SPECIFICATION	305-570-05	PAINT/ COLOUR	PC GREY CASE PLAIN E/SH					
PERFORMANCE SPECIFICATION	SP85105-01	RATING LABEL	LABEL STD. FMT					
CONNECTION DIAGRAM	393-000-AM							


**FASCO**  
 DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

**C N693** MODEL **808536MTB-A11**

VOLTS	415	TYPE	3 PHASE	Hz	50
WATTS	250	DUTY	AOM	PH	3
AMPS	0.95	CLASS	B130	PROT.	NIL
R.P.M.	900	µF/V	S	R	NIL
WATTS IN MAX		MAX KPa			

**SPECIAL REQUIREMENTS:**

- 1) WEATHER PROOF SPEC. BEI 176.
- 2) CONNECTION LABEL 393-487-01 TO BE PUT ON CASE.

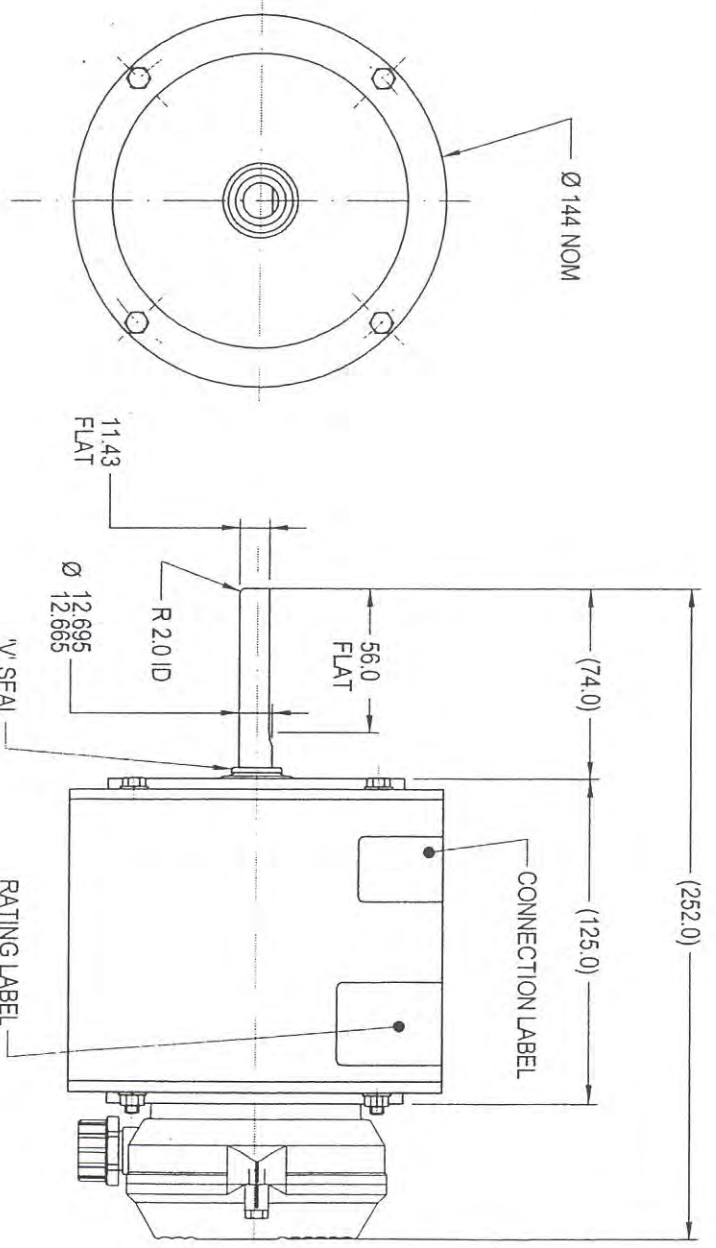

THIRD ANGLE PROJECTION

CONTROL PANEL

4 8 4 8 5 3 6 1 1

