FASCO Australia Proprietary Information

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

V18

MOTOR SPECIFICATION

808555MVA-A22

Q.R.No.	Y003795	CUSTOMER NO.	-					
CUSTOMER	AUSTRALIAN FAN & MOTOR COMPANY							
MOTOR RATING	VOLTS	240	Hz	50	Ph	1	Duty	S1 ACM
	RPM.	1350/1250/1150		1.65	AMPS			
	NOM. OUTPUT	250 WATTS						
ROTATION	CLOCKWISE AT DRIVE END							
CAPACITOR	START	—— µF/V	RUN	⚠8/400	µF/V			
ENCLOSURE	VENTED ENDSHIELDS							
MOTOR TYPE	PSC	INSULATION CLASS	B					
THERMAL PROTECTION	AUTO RESET OVERLOAD							
APPLICATION	FAN CENTRIF - SHAFT HORIZONTAL							
BEARING D.E.	6202 ZZ	LUBRICATION	LONG LIFE, WIDE RANGE					
BEARING N.D.E.	6202 ZZ							
SUPPLY LEAD	SINGLE CORE 1300 ± 30 BOTH LEADS BRAIDED SLEEVING							
EARTH PROVISION	VIA SUPPLIED LEAD							
BASIC BUILD SPECIFICATION	305-570-03	PAINT/ COLOUR	P/C GREY CASE PLAIN E/SHIELDS					
PERFORMANCE SPECIFICATION	SP85455-01							
CONNECTION DIAGRAM	393-425-03	RATING LABEL	SSTDAUTO.FMT					

FASCO

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

N693

MODEL 808555MVA-A22

VOLTS 240	R.P.M. 1350/35P	CLASS B130	Hz 50		
WATTS 250	TYPE CSR	µF/V S NIL	Ph 1		
AMPS 1.65	DUTY AOM	µF/V R 8/400	PROT AUTO		

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

87.0 × 35.0

SPECIAL REQUIREMENTS:

1) CAPACITOR SUPPLIED BY CUSTOMER.

FODE0041 Rev.A

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION

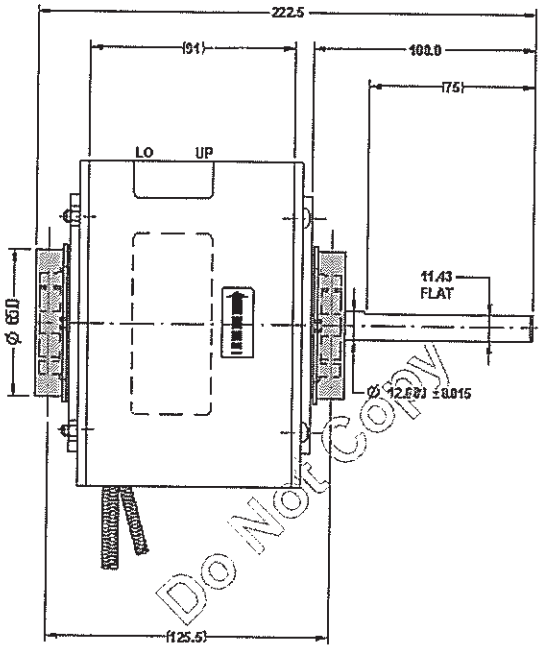

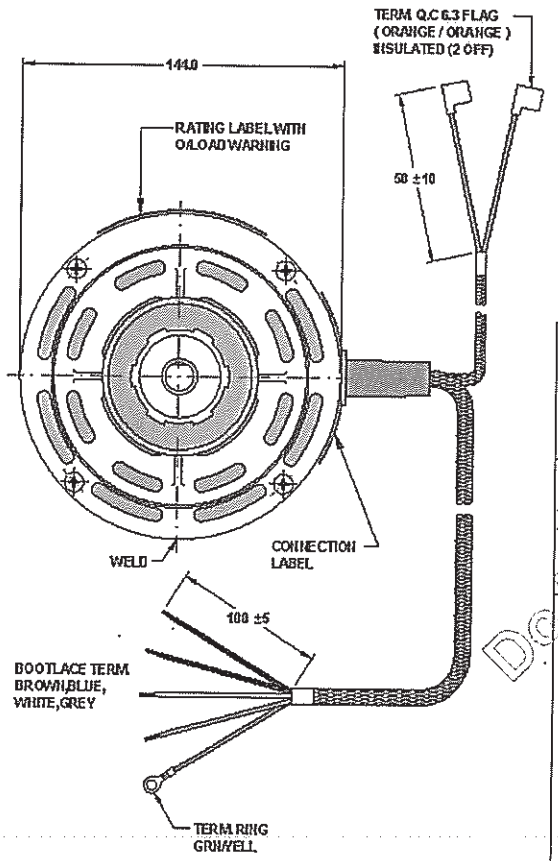

MIC No. 011570 By: ATTAPOL Date: 05/05/08 MIC Note: CHANGE RUN CAPACITOR WAS 7.5 MFD TO BE 8 MFD

Do Not Copy
Do Not Copy
Do Not Copy
This is
HVAConline.com.au