

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT RESPONSIBLE FOR THE APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

THIRD ANGLE PROJECTION

MOTOR SPECIFICATION

Q.R. No.		Y000985		CUSTOMER NO.			
CUSTOMER		CELAIR					
VOLTS	240	Hz	50	Ph	1	Disty	S1 AOM
RPM	1270					AMPS	
NOM. OUTPUT							425 WATTS
ROTATION	CLOCKWISE DRIVE END						
CAPACITOR	START		µF/V	RUN	15/440	µF/V
ENCLOSURE	FULLY VENTED						
MOTOR TYPE	CSR	INSULATION CLASS		B130			
THEMAL PROTECTION	AUTO RESET OVERLOAD						
APPLICATION	FAN-EVAP COOLER						
BEARING D/E	6202 DDU C3 EA2		LUBRICATION		LONG LIFE WIDE RANGE		
BEARING N.D.E.	6202 DDU C3 EA2		FLEX 850 ±30 GREY				
SUPPLY LEAD	VIA SUPPLIED LEAD						
EARTH PROVISION	305-570-13						
BASIC BUILD SPECIFICATION	SP85189-01		PAINT/ COLOUR		PC GREY CASE PLAIN E/SHIELDS		
PERFORMANCE SPECIFICATION	393-402-06		RATING LABEL		SSTDAUTO.FMT		
CONNECTION DIAGRAM							

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS


C N6933 MODEL 80855BNVA-A155 ddmmyyxxx

VOLTS 240 R.P.M. 1270 CLASS B130 Hz 50
 WATTS 425 TYPE CSR µF/V S NIL Ph 1
 AMPS 2.9 DUTY S1AOM JFV/R 15/440 PROT AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

SPECIAL REQUIREMENTS:

- 1) CUSTOMER TO SUPPLY OWN CAPACITOR.
- 2) MOTOR MUST BE LOAD TESTED.

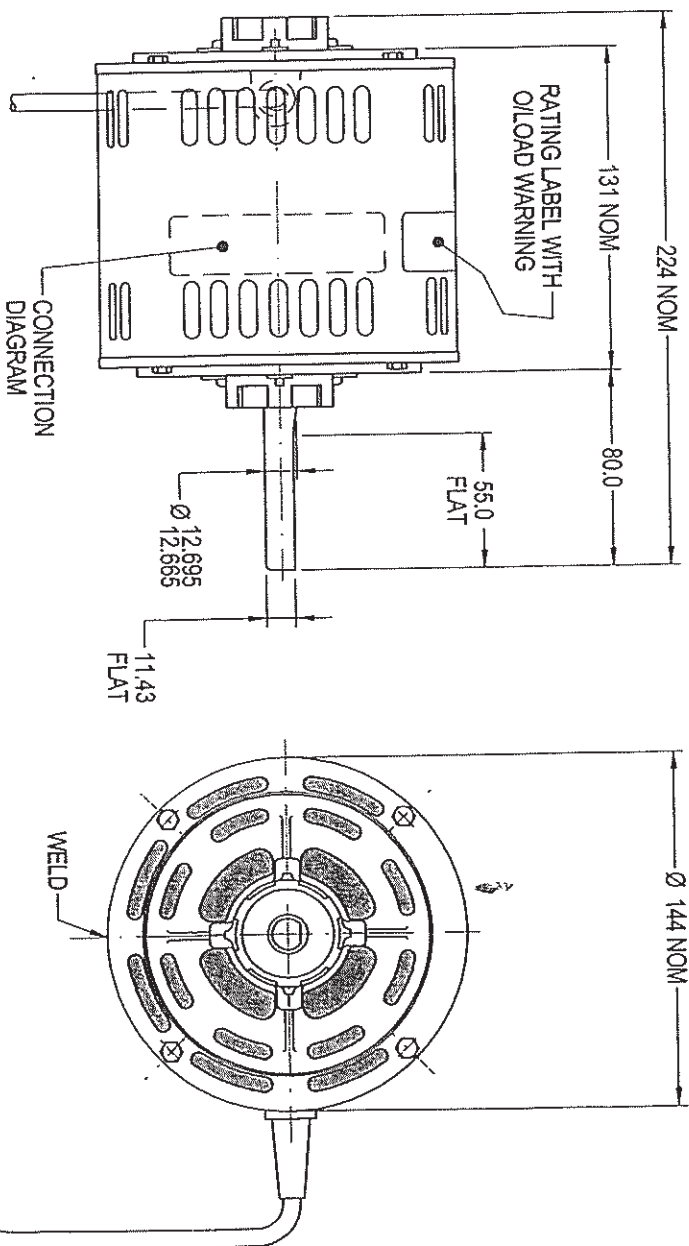

CONTROLLED COPY

1 8 AUG 2001

CONTROLLED COPY

1 8 AUG 2001

MIC No. 003857
 By: EKACHAI
 Date: 23/03/01
 MIC NEW MODEL RELEASE

