

FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT RESPONSIBLE FOR THE APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.



THIRD ANGLE PROJECTION

MOTOR SPECIFICATION

809436NTB-B11

Q.R. No.	8047	CUSTOMER NO.	
CUSTOMER	LOVELOCK LUKE		
VOLTS	415	Hz	50
PHASE	3	DUTY	A.O.M.
RPM	940		
MOTOR RATING	375 WATTS		
ROTATION	CLOCK WISE AT DRIVE END (REVERSIBLE)		
CAPACITOR	START	µF/V	RUN
ENCLOSURE	TOTALLY ENCLOSED		
MOTOR TYPE	3 PHASE	INSULATION CLASS	B130
THERMAL PROTECTION	AUTO RESET OVERLOAD		
APPLICATION	FAN, VERTICAL, SHAFT-UP		
BEARING D.E.	6204 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6204 DDU		
SUPPLY LEAD	FLEX 2500E30 WITH CONDUIT ENTRY VIA SUPPLY LEAD		
EARTH PROVISION			
BASIC BUILD SPECIFICATION	470-071-02	PAINT/ COLOUR	GREY PLAIN E/S
PERFORMANCE SPECIFICATION	SP94120-01	RATING	SSTD AUTO, FMT
CONNECTION DIAGRAM	393-135		

FASCO DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS



C N693 MODEL: 451-022-0055 809436NTB-B11

VOLTS 415 R.P.M. 940 CLASS B130 Hz 50
 WATTS 375 TYPE 3PH I.P.F.V.'S NIL Ph 3
 AMPS 1.1 DUTY A.O.M. I.P.F.V. R. NIL PROT. AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

87.0

SPECIAL REQUIREMENTS:
 1) CONDUIT ASSEMBLY TO SPECIFICATION BEI-250.
 2) MOTOR TO BE WEATHERPROOFED TO SPEC. BEI-176.

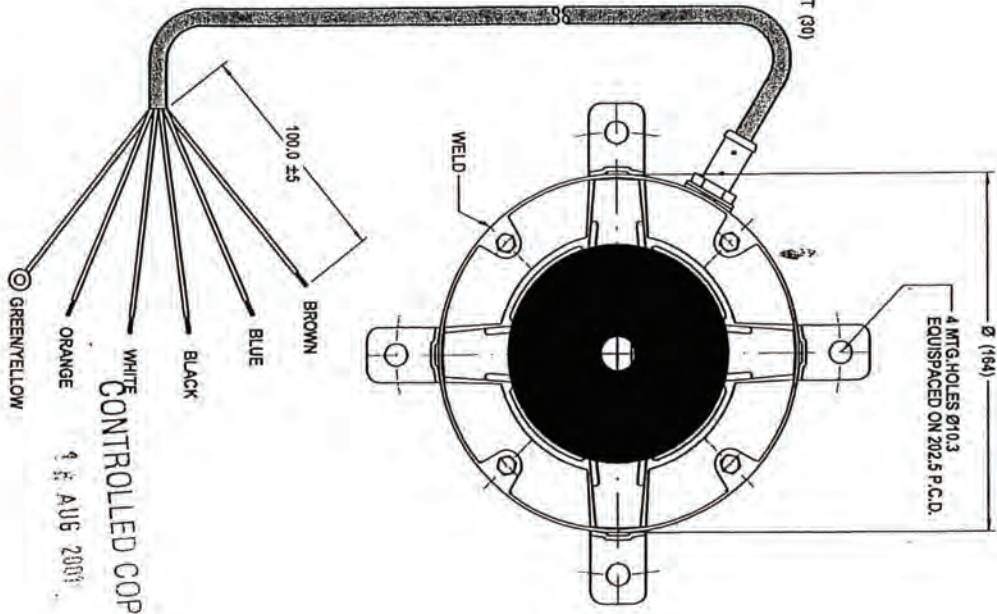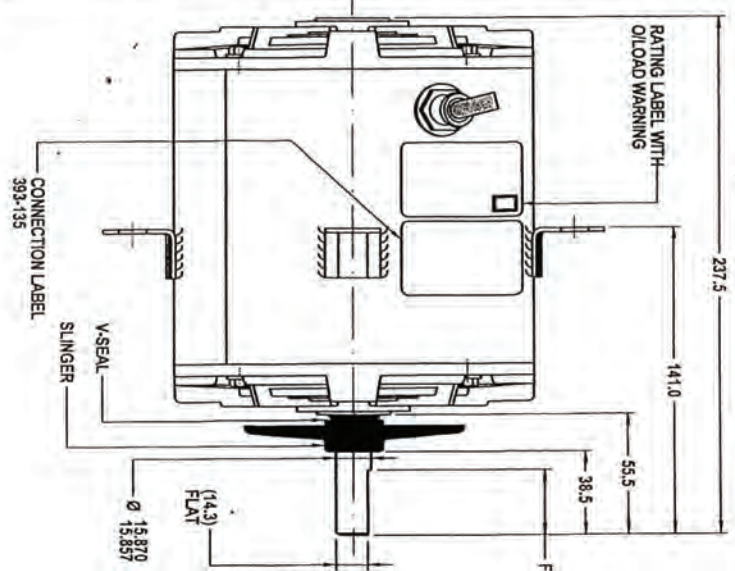

MIC No. 004212 Date: 20/07/01 By: NITTHAD
 MIC INSERT MOTOR WEIGHT 10.1 KG AND SPECIAL REQUIREMENTS OF BEI-251 TO BE BEI-176

