FASCO MOTORS MAY PROVIDE TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN MANY AREAS. HOWEVER, SINCE FASCO MOTOR IS NOT AWARE OF ALL DATA CONCERNING THE USE AND APPLICATION OF THIS MOTOR, THE FITNESS OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY AND IS THE RESPONSIBILITY OF THE CUSTOMER.

MOTOR SPECIFICATION

809455XVB-B13S

Q.R. No.	7629			CUSTOMER NO.	-			
CUSTOMER	FASCO AUSTRALIA							
MOTOR RATING	VOLTS	240	Hz	50	Ph	1	Duty	S1 AOM
	RPM.	1400				8.4		AMPS
	NOM. OUTPUT	1500 WATTS						
ROTATION	ANTI CLOCK WISE AT LEAD END							
CAPACITOR	START	---------	µF/ V	RUN	30/440	µF/ V		
ENCLOSURE	FULLY VENTED							
MOTOR TYPE	CSR		INSULATION CLASS	B				
THERMAL PROTECTION	AUTO RESET OVERLOAD							
APPLICATION	BLOWER MOTOR							
BEARING D.E.	6204 ZZ		LUBRICATION	LONG LIFE, WIDE RANGE				
BEARING N.D.E.	6203 ZZ							
SUPPLY LEAD	SINGLE CORE 1500±30 BRAIDED SLEEVING							
EARTH PROVISION	VIA SUPPLY LEAD							
BASIC BUILD SPECIFICATION	305-342-01		PAINT/ COLOUR	CASE GREY E/S PLAIN				
PERFORMANCE SPECIFICATION	SP94095-01							
CONNECTION DIAGRAM	305-726-01		RATING LABEL	SSTDAUTO.FMT				

FASCO

N693

DESIGNED AND MANUFACTURED TO AUSTRALIAN STANDARDS & SPECIFICATIONS

ddmmyyxxxx

MODEL 809455XVB-B13S

VOLTS	240	R.P.M.	1400	CLASS	B130	Hz	50
WATTS	1500	TYPE	CSR	µF/V S	NIL	Ph	1
AMPS	8.4	DUTY	S1/AOM	µF/V R	30/440	PROT.	AUTO

WARNING MOTOR FITTED WITH INTERNAL AUTO RESET OVERLOAD AND MAY RESTART WITHOUT WARNING

87.0 × 35.0

SPECIAL REQUIREMENTS:

1)_CONNECTION LABEL 393-560-01 TO STICK OUTSIDE ON THE CASE (C)

FINAL INSPECTED MOTORS MUST COMPLY WIT H ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION

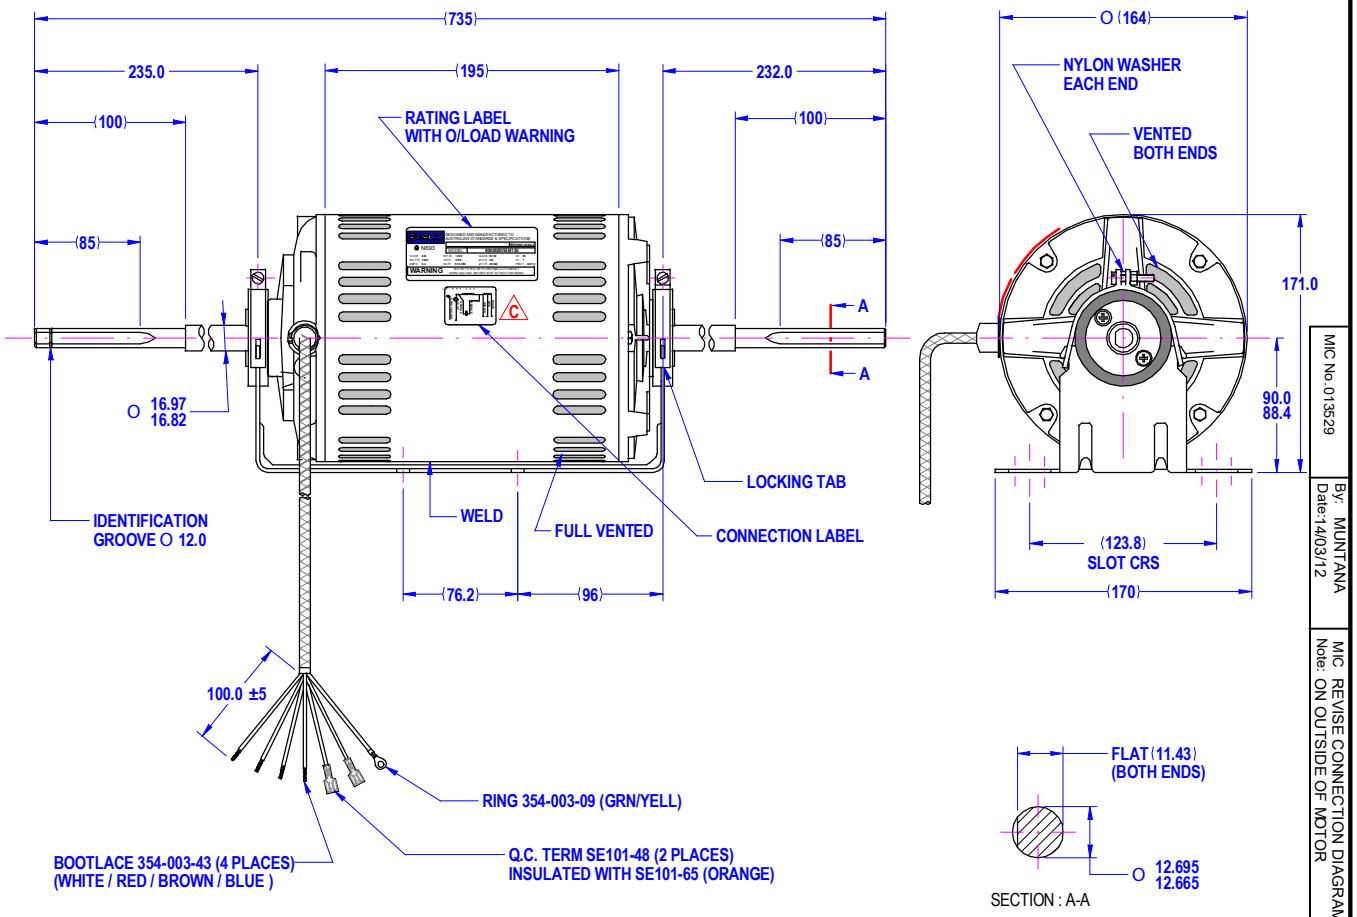

MIC No.013529

By: MUNTANA Date:14/03/12

MIC REVISE CONNECTION DIAGRAM LABEL TO BE STUCK Note: ON OUTSIDE OF MOTOR

"TYPE B CHANGE. REFER MIC AND NOTIFY PRODUCT DEVELOPMENT WHEN BUILDING."

HVAConline.com.au