


**MOTOR SPECIFICATION**

FINAL INSPECTED MOTORS MUST COMPLY WITH ELECTRIC MOTOR VIBRATION SPECIFICATION (ES049)

THIRD ANGLE PROJECTION

**80855BQVA-A22**

Q.R. No.	Y000882	CUSTOMER NO.	17112
CUSTOMER	RINNAI		
MOTOR RATING	VOLTS	240	Hz 50 Ph 1 Duty S1 AOM.
	RPM.	1350	4.9 AMPS
	NOM. OUTPUT	750 WATTS	
ROTATION	ANTI CLOCKWISE DRIVE END		
CAPACITOR	START	-----	μF/V RUN 25/400 μF/V
ENCLOSURE	FULLY VENTED		
MOTOR TYPE	CSR	INSULATION CLASS	B130
THERMAL PROTECTION	THERMAL FUSE CUT-OFF 152 °C		
APPLICATION	FAN - SHAFT UP		
BEARING D.E.	6202 DDU	LUBRICATION	LONG LIFE, WIDE RANGE
BEARING N.D.E.	6202 DDU		
SUPPLY LEAD	FLEX 1100 ± 30 GREY		
EARTH PROVISION	VIA SUPPLY LEAD		
BASIC BUILD SPECIFICATION	305-570-16	PAINT/ COLOUR	PC GREY CASE PLAIN E/SHIELDS
PERFORMANCE SPECIFICATION	SP85178-03		
CONNECTION DIAGRAM	393-531-01	RATING LABEL	AS SHOWN

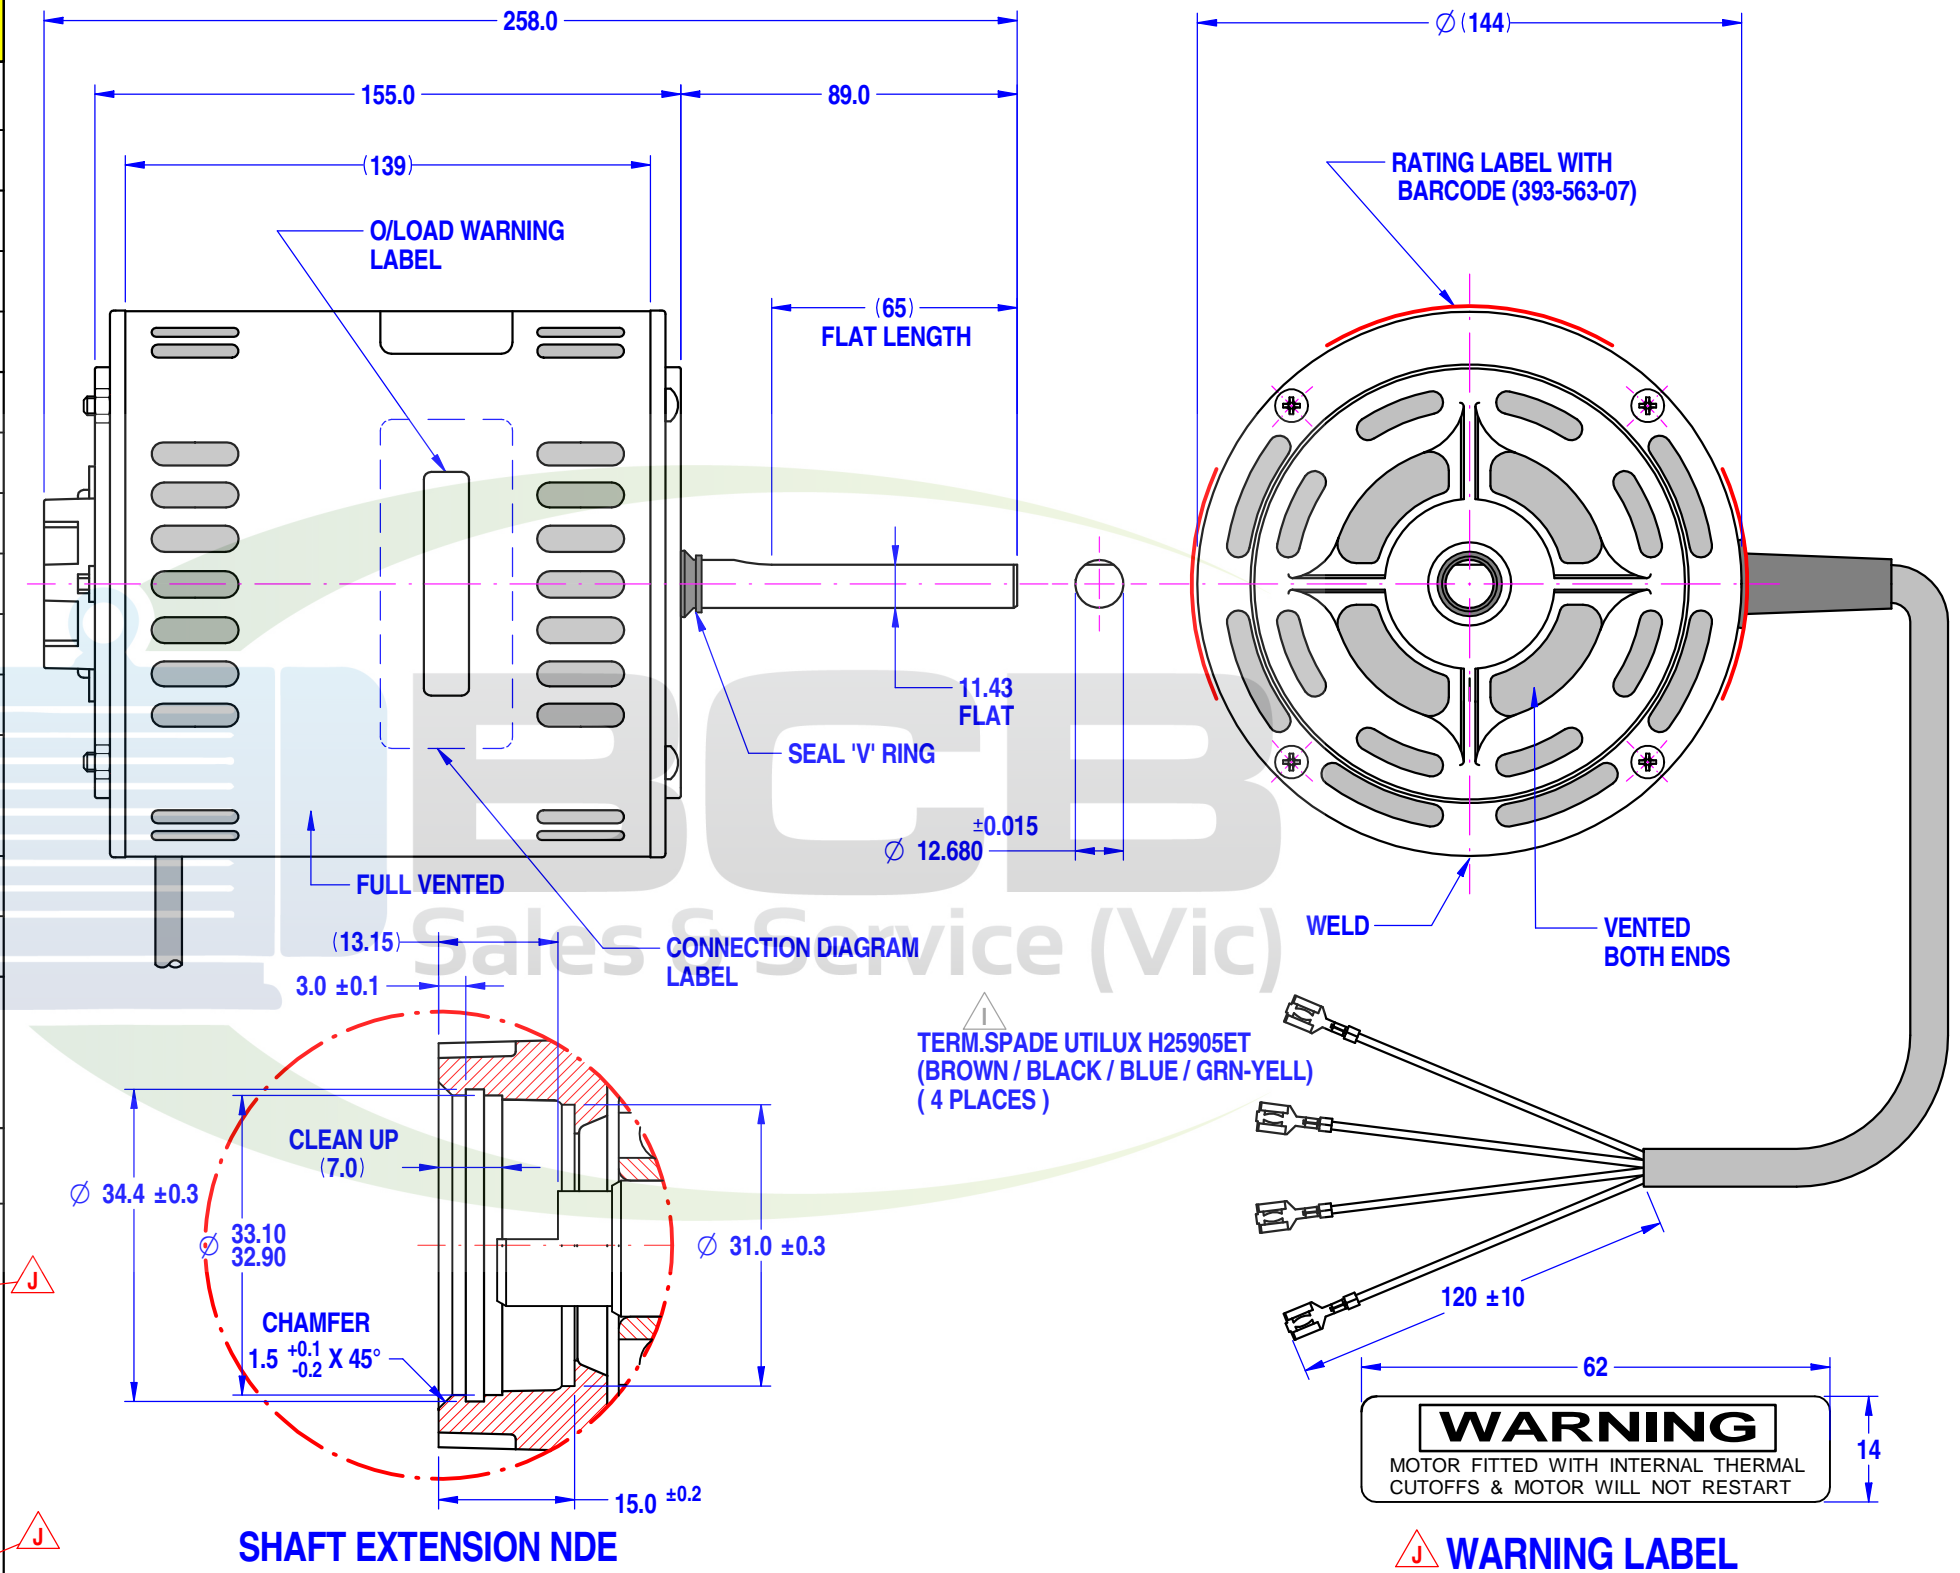

750W COOLER 17112

MODEL 80855BQVA-A22

FASCO S/N ddmmyyxxxx

VOLTS 240 R.P.M. 1350 CLASS B130 Hz 50  
 WATTS 750 TYPE CSR μF/V S NIL Ph 1  
 AMPS 4.9 DUTY S1/AOM μF/V R 25/400 PROT.FUSE

**SPECIAL REQUIREMENTS:**

- 1)\_CAPACITOR SUPPLIED BY CUSTOMER.
- 2)\_MOTOR TO BE MOUNTED SHAFT UP WITH ABUTMENT WASHER IN THE LEAD END.

UNLESS OTHERWISE SPECIFIED : DIMENSIONS ARE IN MM. TOLERANCES		MOTOR WEIGHT	9.5 kg.
DECIMALS	ANGULAR	DRAWN	Sydney 15/05/2000
.X ± 1.0	± 30'	CHECKED	Pipat 14/05/2018
.XX ± 0.1		RELEASED	Suksakorn 14/05/2018
THIS DRAWING REMAINS THE PROPERTY OF FASCO MOTORS AND MAY NOT BE USED, COPIED OR ISSUED WITHOUT WRITTEN PERMISSION FROM FASCO MOTORS		SCALE	N.T.S.

**FASCO THAILAND**

29/7-8 MOO 3, BANGKRUAY - SAINOI Rd., BANGKRANG, MUANG NONTABURI DISTRICT, NONTABURI 11000 THAILAND

FRAME	MOTOR
STATUS	B178:855BV-750-XBD:RINNAI
SHEET	DWG. NO. 80855BQVA-A22
A3	REVISION J

MIC1802049 By: Murtana Date: 11/05/2018 MIC J: CHANGE OVERLOAD TO THERMAL FUSE AND LABEL Note: CHANGE WARNING LABEL AND REMOVE C-TICK LABEL