





LEADERS IN COMMERCIAL EXHAUST SYSTEMS
PROUDLY AUSTRALIAN OWNED AND MANUFACTURED

AXIAL / SUPPLY AIR AXIAL

FANS ESTABLISHED 1947

A/SAA61




- Type A/SAA fans are designed for use in ducted exhaust applications. Each impeller is individually designed and manufactured to precise specifications for maximum airflow at high pressure levels.
- Typical Applications: Can move air at normal to high temperatures for applications such as commercial kitchens, bakeries, warehouses, storage facilities, spray or welding booths. Can also be used to exhaust toxic or explosive gases in industrial applications with suitable motors.
- Galvanised steel casing.
 - Aluminium alloy mixed flow impellers.
 - Weatherproof.
 - Approx Weight: 80kg.
 - Australian standards compliant.

CYCLO INTERNATIONAL PTY LTD

75 Northgate Drive, Thomastown, Victoria, 3074. Telephone: +61 3 9383 6668 Email: sales@cyclointernational.com.au

PERFORMANCE DATA & DIMENSIONS

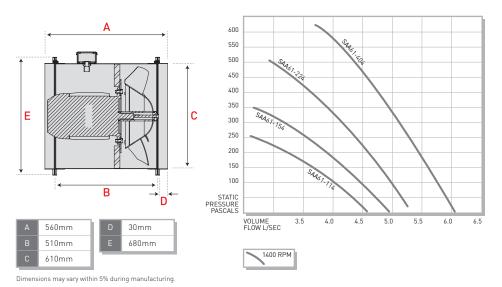

TECHNICAL DATA

MODEL NUMBER	FAN SPEED Rev/Min	kW	AMPS +or-10%	VOLTS	NOISE LEVEL (dBA)*	MOTOR SHAFT mm	IP RATING	
A/SAA61-114-3P	1400	1.1	2.37	415	70	24	55	
A/SAA61-154-3P	1400	1.5	3.2	415	72	24	55	
A/SAA61-224-3P	1400	2.2	4.55	415	73	24	55	
A/SAA61-404-3P	1400	4.0	7.75	415	74	24	55	

^{*} Approx noise level @ 3 meters (dBA)

*** Two Speed motors, controllable with two speed switch (2SS). Available on request.

NOTE: All fans may be controlled with a Cyclo Variable Speed Drive or other control switches. We recommend all speed control units and switches to be used only with products supplied by Cyclo Fans.

ORDERING CODE

Α	6 1	-	2 2	4 -	3 P *
TYPE OF FAN V: VERTICAL EXHAUST A: AXIAL EXHAUST CAV: FOOD TRUCK EXHAUST SAV: SUPPLY AIR VERTICAL SAA: SUPPLY AIR AXIAL	5IZE 250MM 300MM 380MM 460MM 530MM 610MM		MOTOR POWER .18kW .37kW .55kW .75kW 1.1kW 1.5kW 2.2kW 4.0kW	POLE 4 POLE: 1400RPM OR 6 POLE: 900RPM	ELECTRICAL REQUIREMENTS SP: SINGLE PHASE 3P: THREE PHASE

* EXAMPLE ONLY

^{**} Variable speed controllable with Variable Speed Switch (VSS)